


Data Sheet

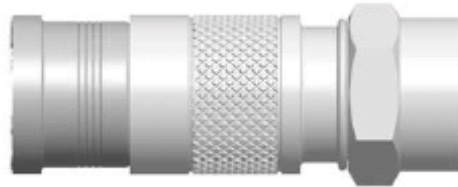

No.	
Connector Type:	CMP 6-51 GREY
Cable Type:	Draka COAX9 AD 11 S

Band Width:	5 MHz – 2,2 GHz	Temperature	
Impedance:	75 Ohm	Installing:	-5 to +50 °C
Amp. Rating:	2 A	Operating:	-40 to +60 °C
Shielding:	EN 50117: Class A++		

Return Loss: @ MHz, Better Than	
500:	-35 dB
860:	-29 dB
1000:	-28 dB
1750:	-23 dB

Insertion Loss: @ MHz, Better Than	
500:	0,1 db
860:	0,1 db
1000:	0,1 db
1750:	0,1 db

Pull Strength:	
Cable:	25 kg

Dielectric Strength:	2 kV
Insulation Resistance:	(@500V): >29,99 Gohm
Inner Conductor:	Resistance 1 mΩ / 1A DC.

Material and Plating		
Body	Brass	Ni
Compression ring	Delrin 527	

In order to continuously supply the best products, PPC reserves the right to change the products and specifications at any time without prior notice.