


Data Sheet

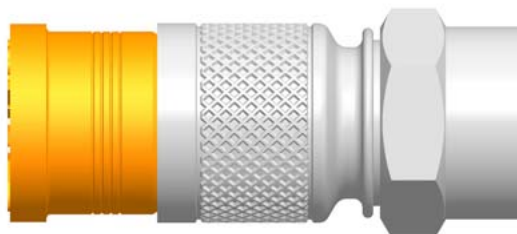

No.	84002000
Connector Type:	CMP – MC37 ORANGE
DRAKA Cable Types:	COAX11 AD 08 S

Band Width:	5 MHz – 2,2 GHz
Impedance:	75 Ohm
Amp. Rating:	2 A
Shielding:	>108 db @ 900 MHz

Temperature	
Installing:	-5 to +50 °C
Operating:	-30 to +60 °C
Sealing Test:	IP X8

Return Loss: @ MHz, Better Than	
500:	-44 dB
860:	-36 dB
1000:	-35 dB
1750:	-29 dB

Insertion Loss: @ MHz, Better Than	
500:	0,1 db
860:	0,1 db
1000:	0,1 db
1750:	0,1 db

Pull Strength:	
Cable:	32 kg

Dielectric Strength:	2 kV
Insulation Resistance:	(@500V): >29,99 Gohm
Inner Conductor:	Resistance 1 mΩ / 1A DC.

Material and Plating		
Body	Brass	Ni
Compression ring	Delrin 527	

Tested on: HP5753D / HP85047A